

AV420-RF Radio-Controlled Solar Airfield Light

Features

- Integrated solar/battery system
- 4 x 5watt solar modules
- 20Ah SLA battery (user-replaceable)
- IP68 water and dust proof
- Global 2.4GHz radio control
- Rugged all aluminium chassis construction
- Up to 3 year product warranty
- Optional dual mode visible/IR output

Compliance

- ICAO Annex 14 Volume 1, 'Aerodrome Design and Operations', Forth edition July 2004.
- Runway Edge - paragraph 5.3.9 runway edge light - non-precision
- Threshold - paragraph 5.3.10, 5.3.11 threshold light or end light
- Approach - paragraph 5.3.4.1A & B, 5.3.4.8 for use as non-instrument or non-precision simple approach lighting system
- Obstruction - paragraph 6.3.11 for use as low-intensity Type A obstacle light

Applications

- Runway Edge
- Helipad Edge
- Threshold
- Approach (Strobe & Fixed)
- Obstruction



Avlite Systems' AV420-RF is a robust, completely self-contained remote-controlled LED light designed for a range of aviation applications including runway, threshold and approach lighting. When set up as a complete airfield, this fully functioning lighting system can be controlled from the tower with no costly cabling or trenching required.

In addition, the AV420-RF system has no other infrastructure, special equipment or expertise requirements for installation. Lower capital and zero maintenance costs are also amongst the major benefits of Avlite's AV420-RF lighting system.

The AV420 Solar Runway Edge Light is ICAO compliant for use in aerodromes with either extraneous lighting (50cd), or without extraneous lighting (25cd), and is capable of creating a temporary, portable or permanent 24hr airfield.

The tough polycarbonate lens is specifically designed for use with LEDs, and the patented internal 360° Omnidirectional LED Reflector ensures consistency of light output and intensity. The sectored approach light directs all the light output to 180 degrees.

The unit is designed to offer years of maintenance-free, reliable service in the world's harshest environments.

Radio Control

Avlite Systems' AV420-RF enables users to directly control the operation of singular or groups of airfield lights via a 2.4GHz handheld transceiver or PC interface.

- Control groups of lights independently
- Activate and deactivate lights
- Change light colors remotely
- Switch between infrared and visible light
- Set lights to group flash synchronisation





Head Office
 Avlite Systems
 11 Industrial Drive,
 Somerville VIC 3912 AUSTRALIA
 Ph: +61(0)3 5977 6128 Fax: +61(0)3 5977 6124
 Web: www.avlite.com Email: info@avlite.com

USA Customers
 Avlite Systems, Inc.
 4458 Hwy 268 East
 Pilot Mountain, NC 27041
 Ph: 336-351-3519 Fax: 336-351-3547



AV420-RF

Radio-Controlled Solar Airfield Light

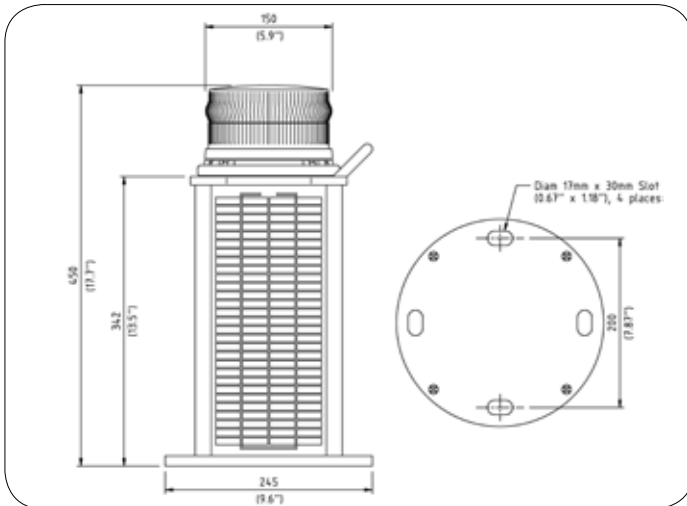

Convenient
user-replaceable
battery

SPECIFICATIONS •

Light Characteristics

Light Source	36 ultra-high intensity LEDs (18 LEDs in the 180 degree approach light)
Available Colors	Red, Green, White, Yellow, Amber, Blue, Sectored Combinations
High Intensity (temporary)	125cd (white)
Medium Intensity (temporary)	50cd
Standard Intensity (cd)	>25cd
Horizontal Output (degrees)	360
Vertical Divergence (degrees)	0 to +15
Reflector Type	Omnidirectional 360° LED Reflector (US Pat. No. 6,667,582. AU Pat. No. 778,918)
Available Flash Characteristics	Fixed-on as standard (>250 available (user-adjustable))
Intensity Adjustments	Adjustable in 25% increments
LED Life Expectancy (hours)	>100,000

Electrical Characteristics

Circuit Protection	Integrated
Operating Voltage (v)	12
Autonomy	200 hours at standard intensity
Temperature Range	-40 to 80°C

Solar Characteristics

Solar Module Type	Multicrystalline
Output (watts)	20 (4 x 5watt)
Solar Module Efficiency (%)	14
Charging Regulation	Regulator controlled

Power Supply

Battery Type	SLA (Sealed Lead Acid)
Battery Capacity (Ah)	20
Nominal Voltage (v)	12

Physical Characteristics

Body Material	7-stage powder-coated aluminium
Lens Material	LEXAN® Polycarbonate - UV stabilized
Lens Diameter (mm/inches)	150 / 5 7/8
Lens Design	External optics with interior flute design
Mounting	4 x 17mm holes on 200mm PCD
Height (mm/inches)	450 / 17 3/4
Width (mm/inches)	245 / 9 2/3
Mass (kg/lbs)	10.8 / 23 3/4
Product Life Expectancy	Up to 12 years

Certifications

CE	EN61000-6-3:1997. EN61000-6-1:1997
Quality Assurance	ISO9001:2000
Waterproof	IP68

Intellectual Property

Patents	US Pat. No. 6,667,582. AU Pat. No. 778,918
Trademarks	AVLITE® is a registered trademark of Avlite Systems

Warranty *

Up to 3 years

Options Available

• IR



• Specifications subject to change or variation without notice
* Subject to standard terms and conditions